

Build your own **Ford** GT

1



Build your own Ford GT

DEAGOSTINI
MODELSPACE™
www.model-space.com

STAGE

PAGE

- | | | |
|---|------------------|---|
| 1 | The bonnet | 3 |
| 2 | The carburettors | 7 |



Ford Motor Company
trademarks and trade
dress used under license
to ehk China Company Ltd.



Gulf trademarks under license
from Gulf Oil International Ltd.

Published in the UK by De Agostini UK Ltd, Royds Withy King, 65 Carter Lane, London EC4V 5EQ.
Published in the USA by De Agostini Publishing USA, Inc., 299 Park Avenue • New York, New York 10171.
All rights reserved © 2019

Warning: Not suitable for children under the age of 14.

This product is not a toy and is not designed or intended for use in play.
Items may vary from those shown.

Stage 1: The bonnet



YOUR PARTS

- 1-A Bonnet
- 1-B Right headlight housing
- 1-C Left headlight housing
- 1-D Right headlight
- 1-E Left headlight
- 1-F Right auxiliary light
- 1-G Left auxiliary light



STEP 1-1

Store the pieces supplied with this stage for later use.



STAGE COMPLETE





Faithful reproduction of the original V8 engine



LENGTH: 510mm.
WIDTH: 222mm.
HEIGHT: 128mm.
WEIGHT: 8kg.

Opening and closing doors





Authentically reproduced steering wheel

Working lights



Working steering system




Stage 2: The carburettors




YOUR PARTS

- 2-A Carburettor base
- 2-B Intake manifold
- 2-C Carburettor cover
- 2-D Carburettors
- 2-E Diaphragms
- 2-F Throttle arm 1
- 2-G Throttle arm 2
- 2-H Fuel hose
- 2-I Screws FP01 2.3 x 4mm

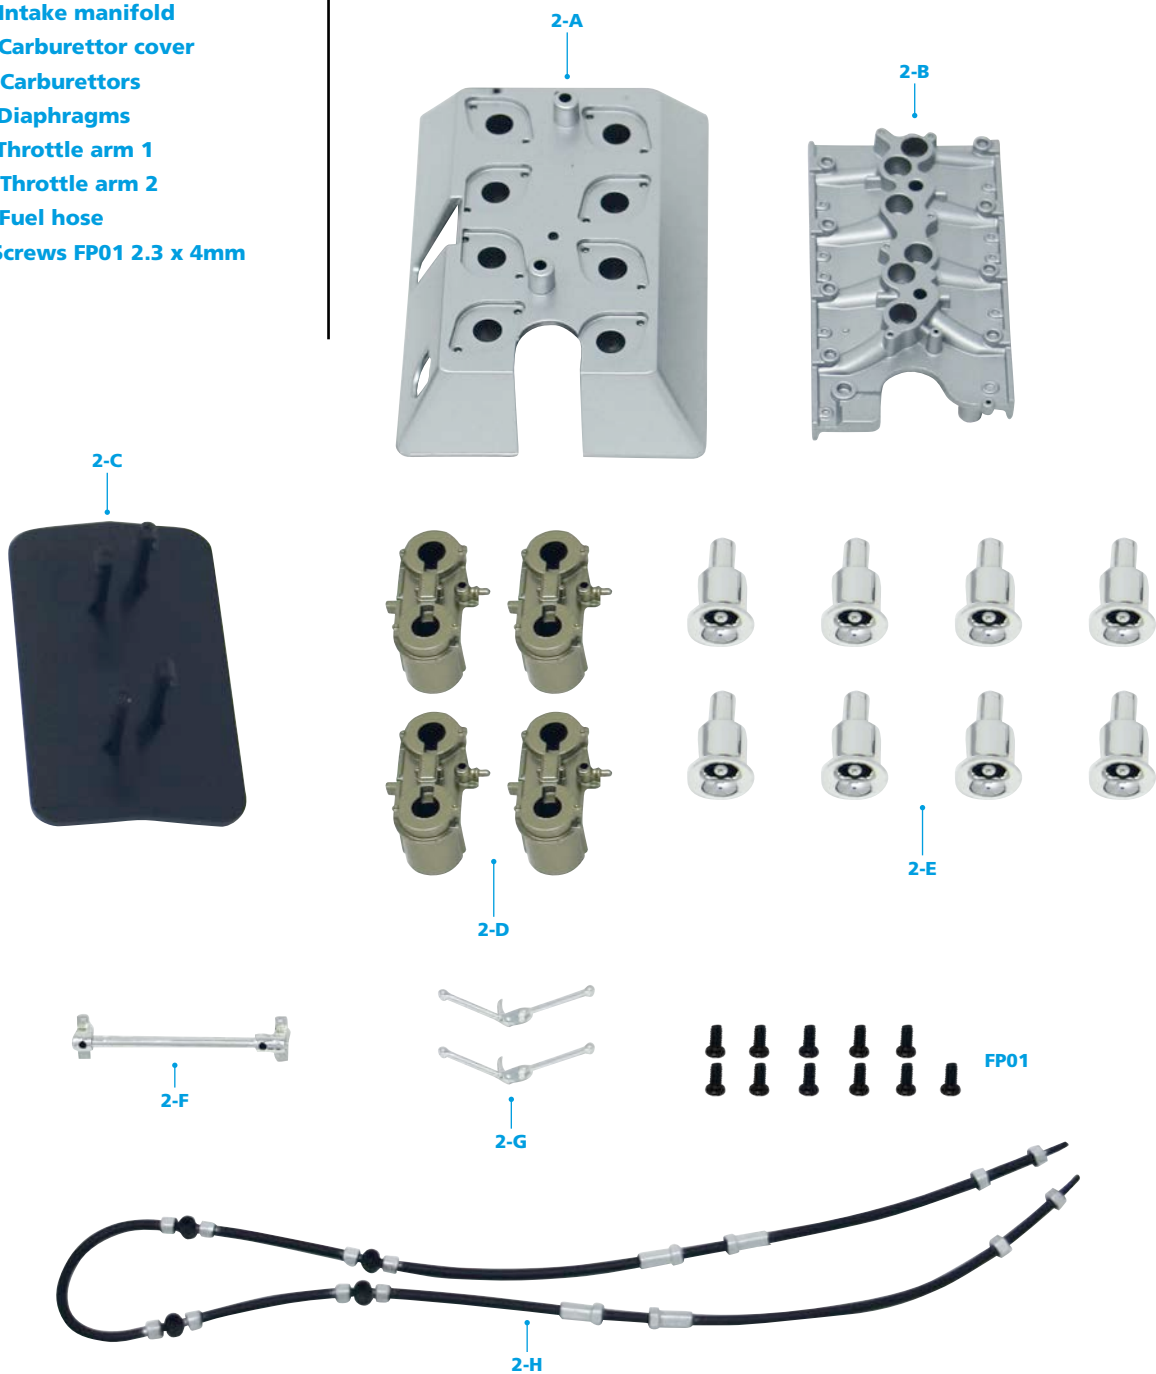



STEP 2-1

Insert the pivot of one throttle arm 2 (2-G) into the hole at the end of throttle arm 1 (2-F). Gently press the parts together. Then fit the second throttle arm 2 into the hole at the other end, as shown.

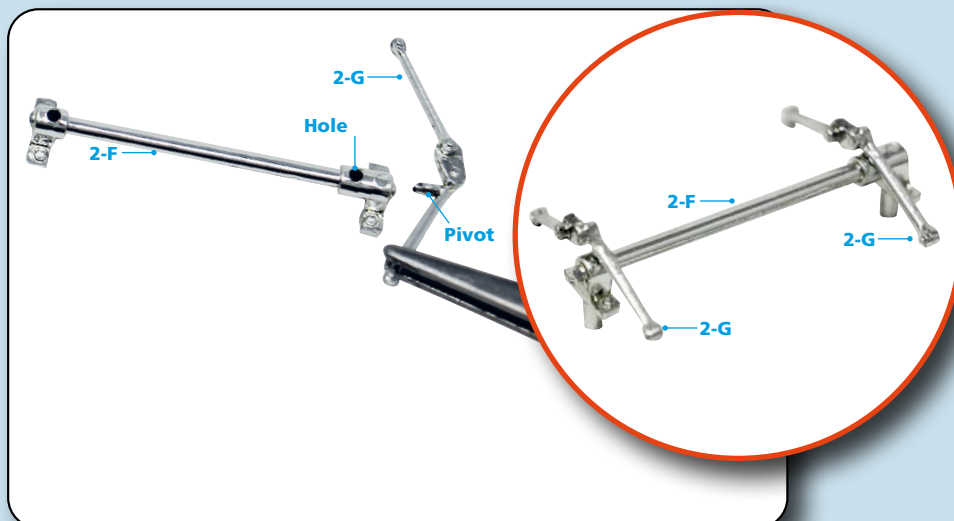


STEP 2-2


Position the throttle arm assembly in the two holes in the carburettor base (2-A).

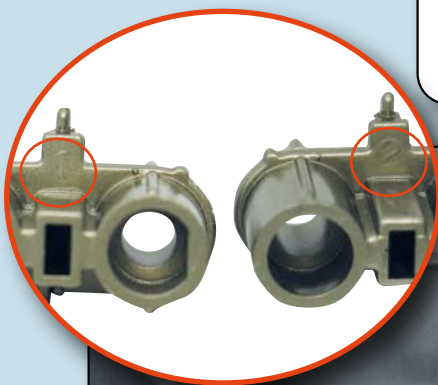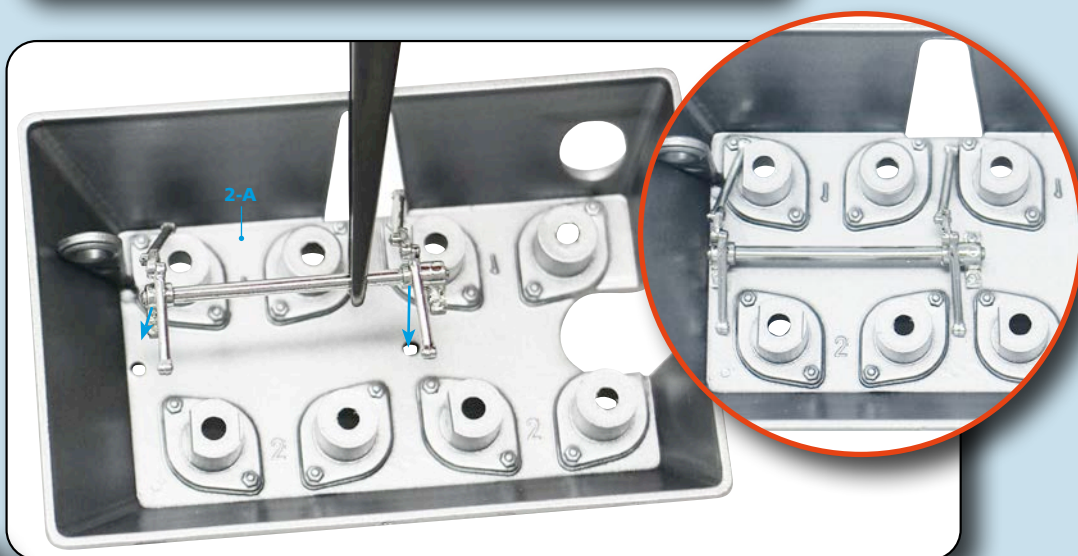

STEP 2-3


The carburettors and base have corresponding numbers stamped on them. Fit one of the carburettors (2-D) stamped '1' onto the corresponding part of the base. The carburettors will only fit in one orientation.

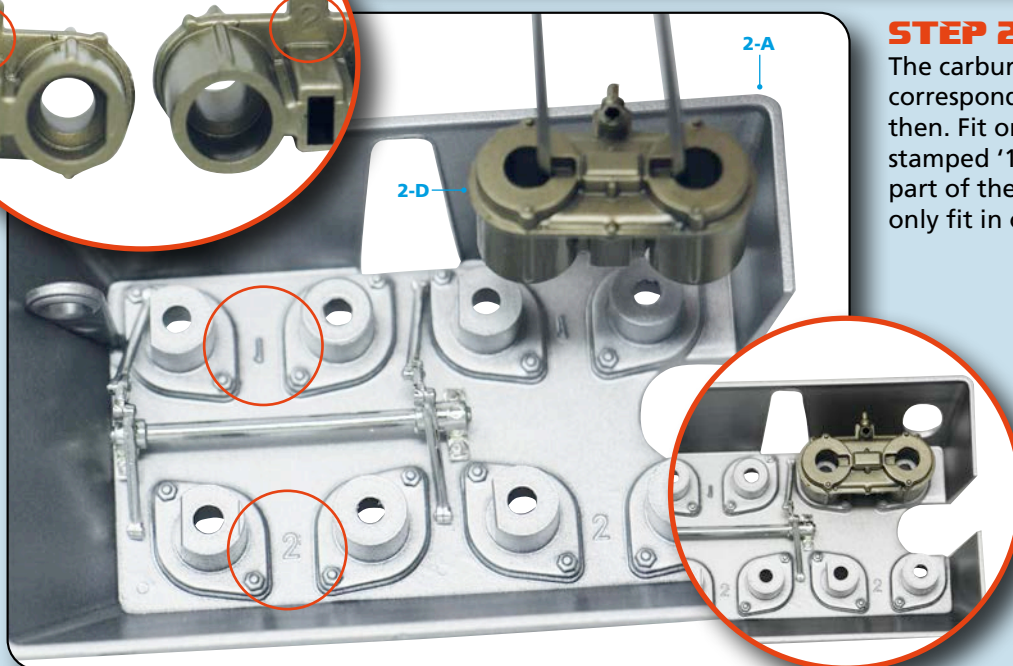

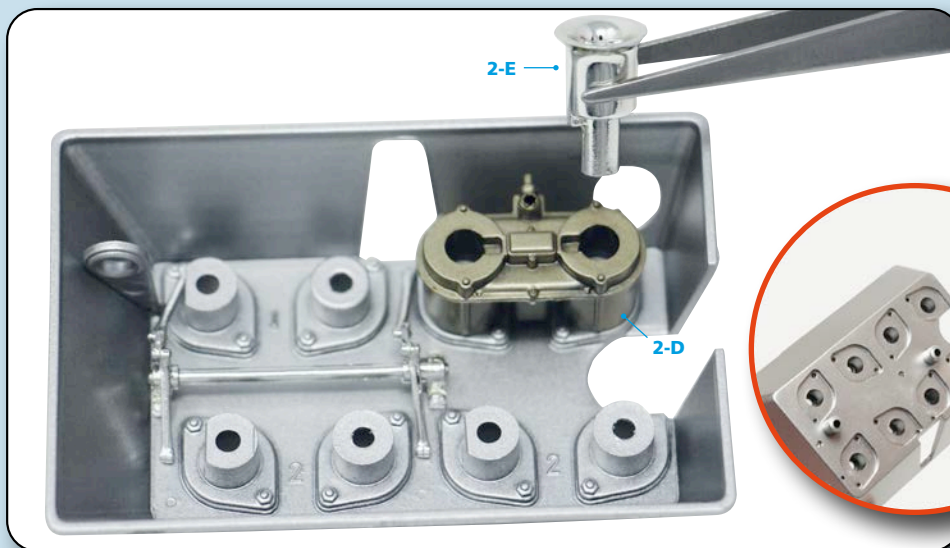

STEP 2-4

Place one of the diaphragms (2-E) into the carburettor. Hold the parts in place and secure from the other side of the base with an FP01 screw.

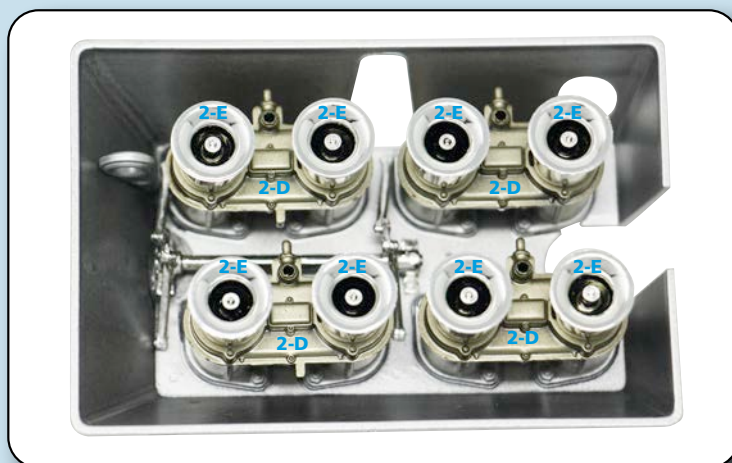


STEP 2-5

Repeat this process to fit the remaining carburettors and diaphragms.




STEP 2-6


Pass the fuel hose (2-H) through the ring inside carburettor base.

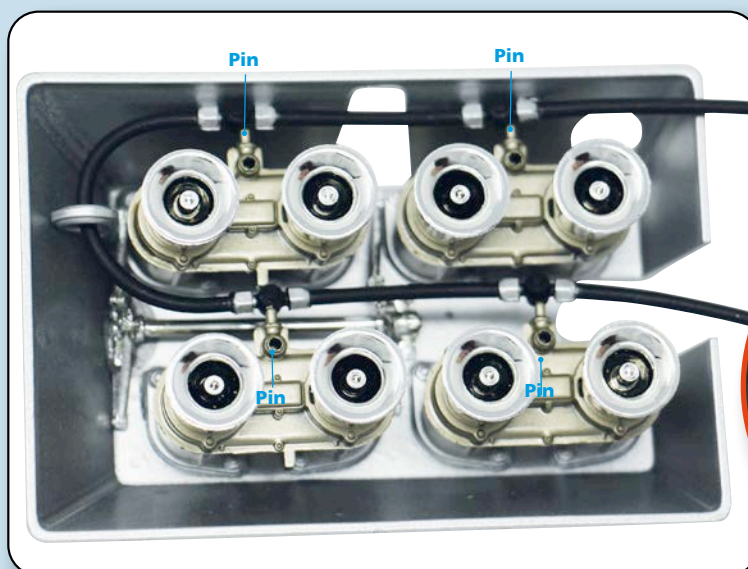

STEP 2-7



Insert the pins of the fuel hose (2-H) into the holes in the carburettors, as shown.

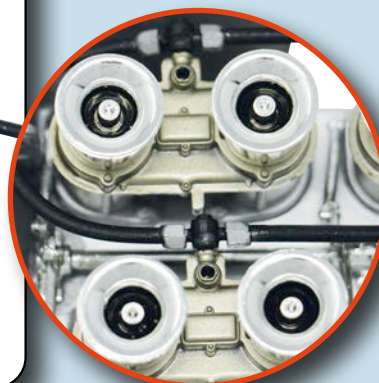

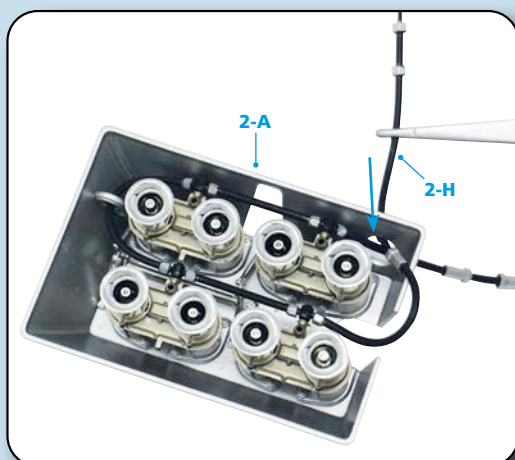



STEP 2-8

Pass the end of the fuel hose through the hole in the side of the base.

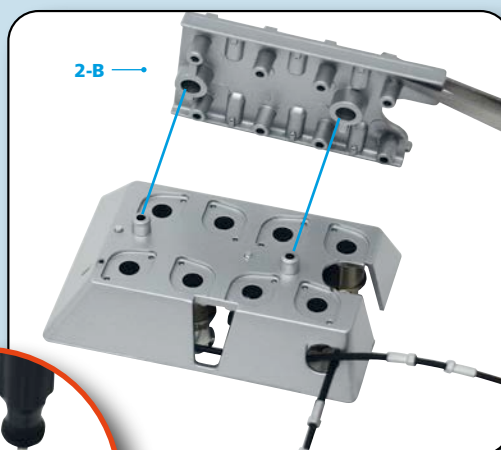

STEP 2-9

Turn the assembly over and secure the intake manifold (2-B) to the bottom of the base with two FP01 screws.

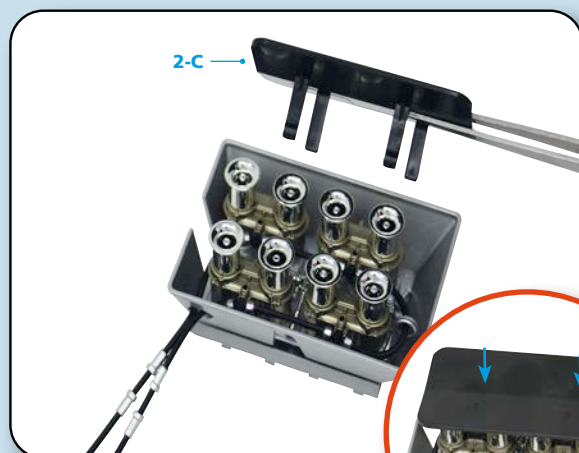

STEP 2-10

Press the carburettor cover (2-C) into the centre of the assembly.



Stage complete

Keep any assembled or unused parts to one side.

STAGE COMPLETE

