




Your parts

Starboard beak decorations




Tools and equipment

Knife Sandpaper Superglue Ruler Tweezers Brushes Wood stain Red paint

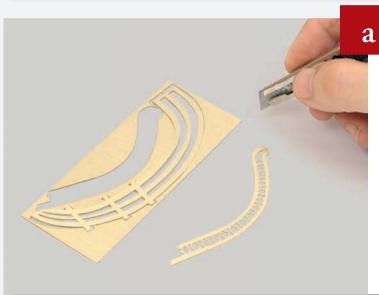

Carefully remove the beak decorations from the starboard parts sheet.

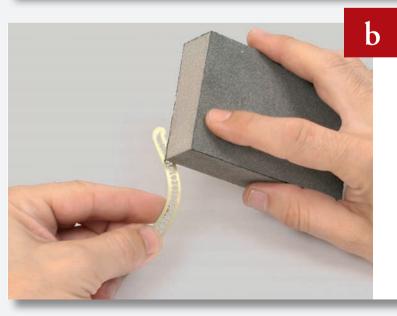

Smooth the edges of the parts to remove any sharp or rough areas.





Bend the beak decoration shown to fit around the part of the beak painted blue.






Check the decoration against the painted area of the starboard side of the beak, and adjust its shape so that it fits flush.




When the decoration fits flush, glue it into place.



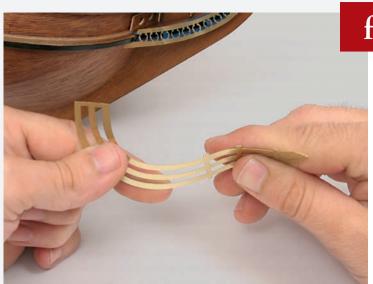


Bend the second starboard beak decoration, as shown, to prepare it for fitting.



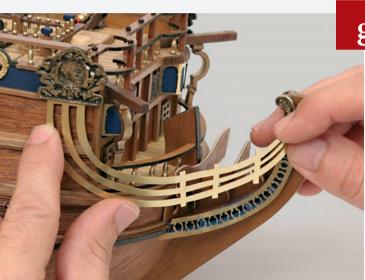

Hold the second decoration against the beak and below the crest mount. Adjust the shape if necessary to make it fit and then glue it into place.

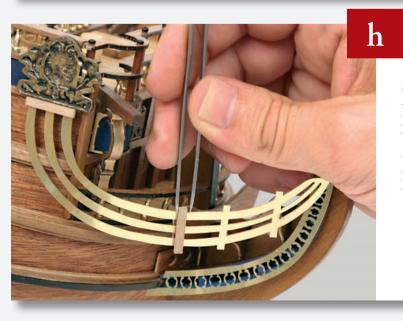

Cut some surplus 2 x 3mm wooden strips into four 17mm lengths. Glue one horizontally below the crest mount and the remaining three on the uprights. Stain the pieces when the glue has dried.





Glue three beads to each of the wooden strips, in line with the bars of the decoration, as shown in the photo.






Paint the front of each of the beads of the three vertical wooden strips with red paint.





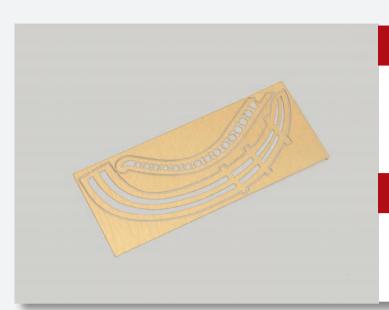

Your parts


Port beak decorations



Tools and equipment

Knife Sandpaper Superglue Ruler

Tweezers Brushes Wood stain Red paint

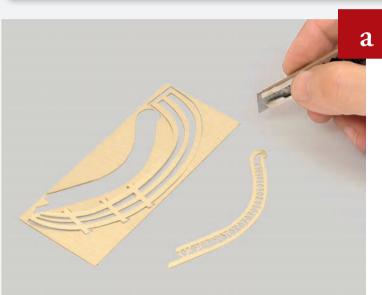

Carefully remove the port beak decorations from the parts sheet and then smooth the edges of the parts to remove any sharp or rough areas.




Bend the beak decoration shown to fit around the part of the beak painted blue on the port side.



Check the decoration against the painted area of the beak, and adjust its shape so that it fits flush. When it fits flush, glue it into place.



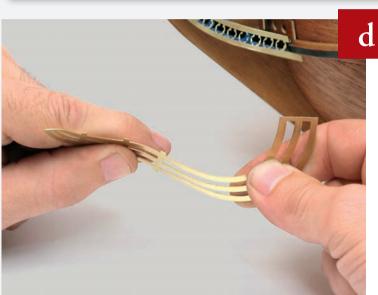

Bend the second decoration, as shown, to prepare it for fitting.




Hold the second decoration against the beak and below the crest mount on the port side.





Adjust the shape if necessary and then glue into place.



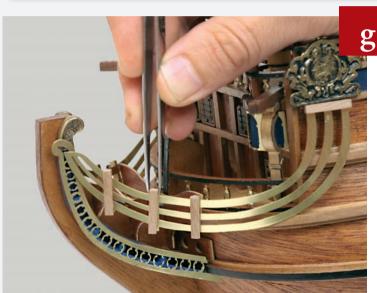

Cut some surplus 2 x 3mm wooden strips into four 17mm lengths. Glue one horizontally below the crest mount and the remaining three on the uprights.



Stain the lengths when the glue has dried.



Glue three beads to each of the wooden strips, in line with the bars of the decoration, as shown in the photo.





Paint the front of each of the beads of the three vertical wooden strips with red paint.



 \mathbf{k}






Your parts

Figurehead
Figurehead crown
Crest
Double blocks 4mm
Beads

Tools and equipment

Superglue Black paint Tweezers Gold paint Brushes Red paint

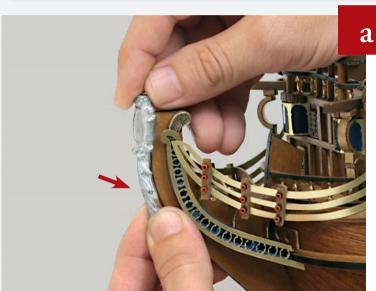

Hold the figurehead against the front of the beak and adjust its shape so that it fits flush.



When the figurehead is the correct shape, glue the crown on the flat surface at the top.






Paint the figurehead black.





When the black paint has dried, lightly go over the figurehead with gold paint to highlight the details.

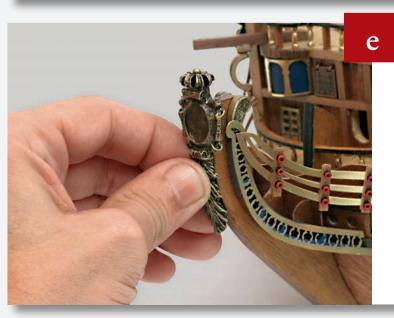

Glue the figurehead in place on the front of the beak when the paint has dried.






Paint the ball on top of the crown with red paint.





Using the arrows in the photo as a guide, glue four beads into place – one at the bottom of each bannister and one on top of each dowel.

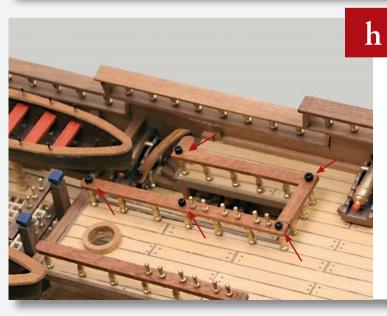

Glue another five beads on top of the bannister around the starboard side of the quarterdeck, as shown.





Repeat the previous step for the bannister on the port side of the quarterdeck.





Glue a further four beads to the tops of the dowels and ends of the bannisters of the poop deck, as indicated by the arrows.







Your parts

Eagle decorations Lantern Brass wire 1mm



Tools and equipment

Superglue Pliers Ruler Brushes Wire cutters Red paint



Glue two eagle decorations to the port bulwark at the bow, each one aft of a cannon.




Glue another seven eagles to the port bulwark, at the points indicated by the arrows.





Glue the remaining three eagles to the starboard side, at the points indicated.



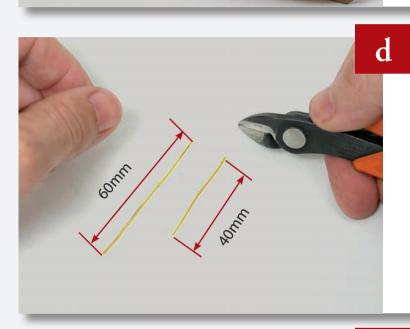


Cut two lengths of brass wire, one 40mm long and one 60mm long.




Take the 60mm length of wire and loop one end around the lantern.



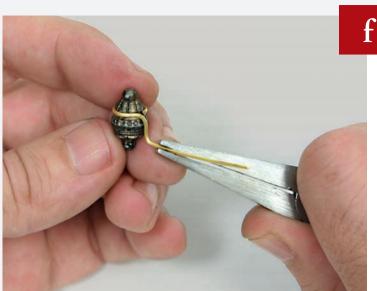


Angle the wire down and then bend it out so that it points away from the lantern, as shown.



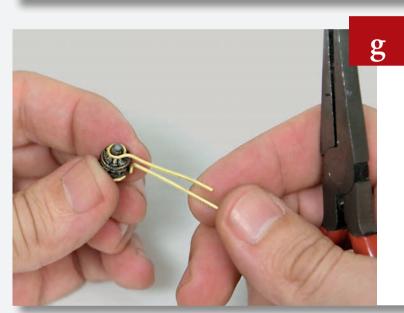

Take the 40mm length and loop it around the projection at the bottom of the lantern.

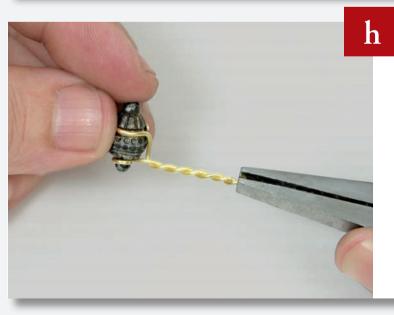

Twist the two lengths of wire together with a pair of pliers. Then bend the twisted wires downwards at a distance of 10mm from the lantern.





Paint the circular depressions in the lantern with red paint.





This is what your assembled lantern should look like. Keep it to one side for later use.

