

Build your own **Ford GT**

21



Build your own **Ford GT**

DEAGOSTINI
MODELSPACE™
www.model-space.com

STAGE

PAGE

91	Boot frame and lower front panel	343
92	Headlight housings	348
93	Front left LED light and auxiliary light lens	352
94	Front right LED light and auxiliary light lens	355
95	Mounting the front LED light	358



Ford Motor Company
trademarks and trade
dress used under license
to ehk China Company Ltd.



Gulf trademarks under license
from Gulf Oil International Ltd.

Published in the UK by De Agostini UK Ltd, Royds Withy King, 65 Carter Lane, London EC4V 5EQ.
Published in the USA by De Agostini Publishing USA, Inc., 299 Park Avenue • New York, New York 10171.
All rights reserved © 2021

Warning: Not suitable for children under the age of 14.

This product is not a toy and is not designed or intended for use in play.
Items may vary from those shown.

STAGE 91: Boot frame and lower front panel




YOUR PARTS


91-A Left headlight housing

91-B Air intake manifold

91-C Screws FD01 2.3 x 4
mm

Ø 3.8 mm

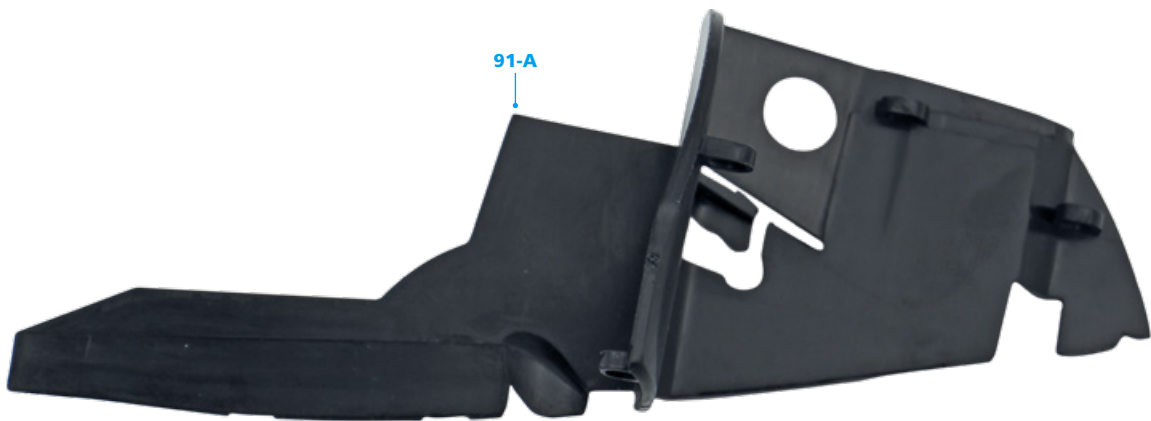


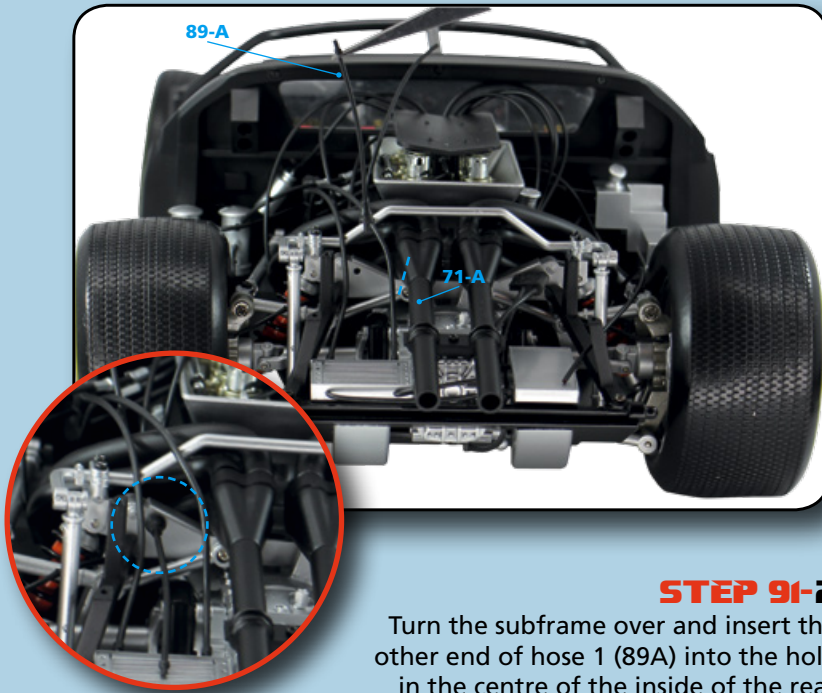


STEP 9I-1

Get the piece you assembled in the previous stage and engine hose 1 (89A). Insert the hose into the hole on the left side of the rear transmission subframe (71A), as shown in the photo.


STEP 9I-2


Turn the subframe over and insert the other end of hose 1 (89A) into the hole in the centre of the inside of the rear left air intake duct cover (88D), the only hole remaining. Insert the linchpin into the hole in the end.

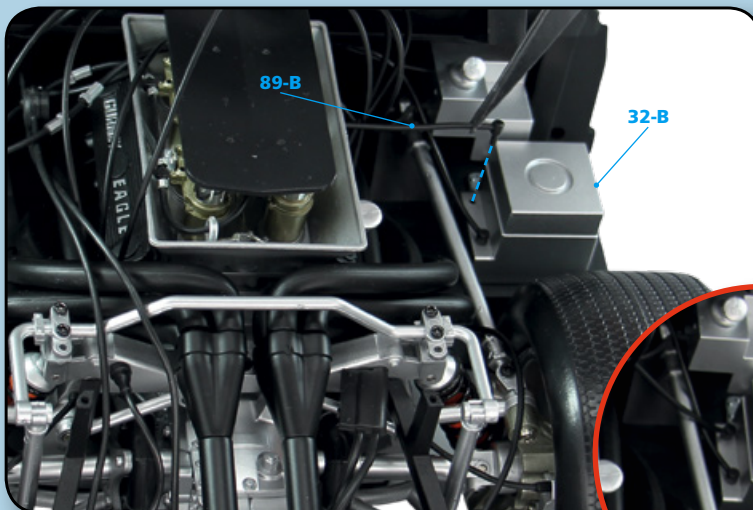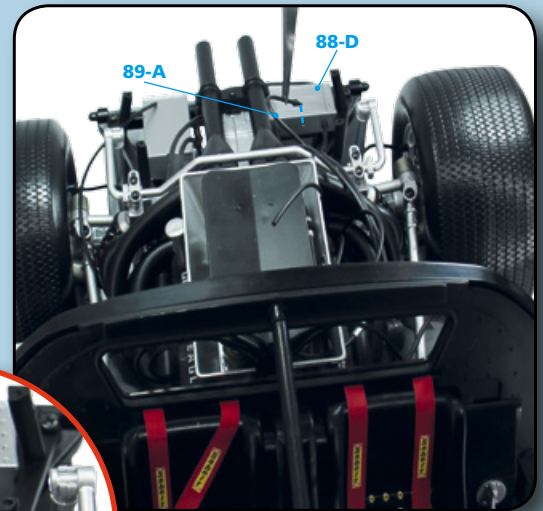

STEP 9I-3

Insert engine hose 2 (89B) into the remaining hole in the top of the battery box cover (32B). Insert the last L-shaped linchpin into the housing.


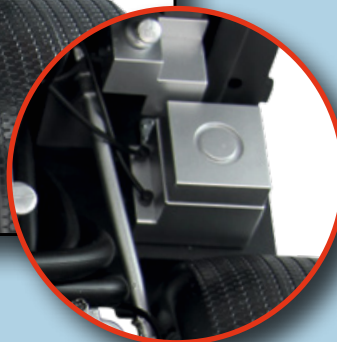


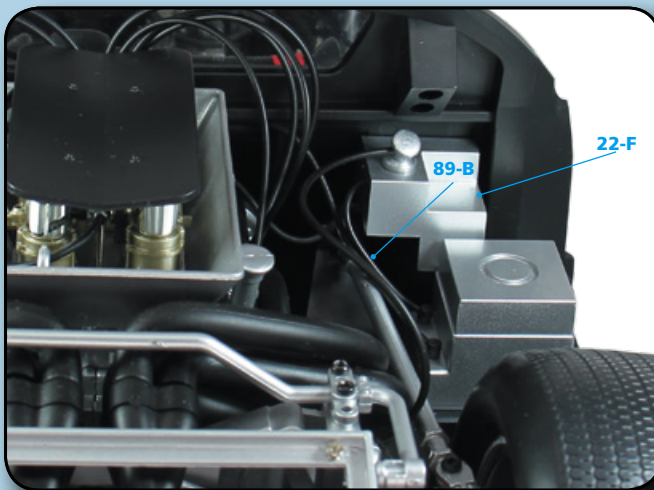

STEP 91-4


Insert the free end of engine hose 2 (89B) into the outermost hole in the side of the engine compartment tank (22F), as shown in the photo.


STEP 91-5
Position the boot grille frame (89C) over the left (75A) and right (75B) engine mounts. First, identify the four attachment points.

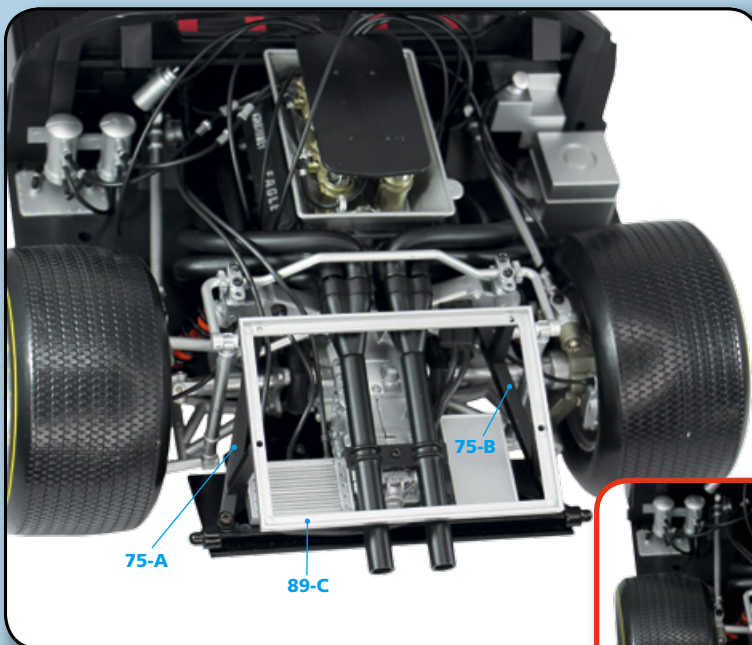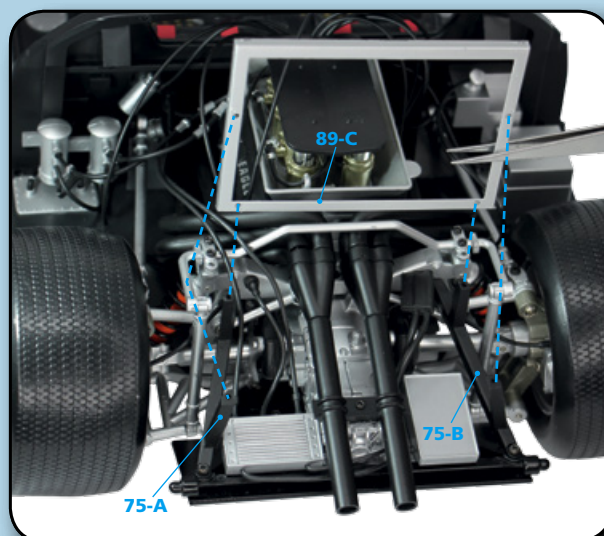

STEP 91-6

Attach the rear hood grille frame (89C) to the engine mounts (75A and 75B), using four FD09 screws, supplied with stage 89, to secure the frame to the mounts.

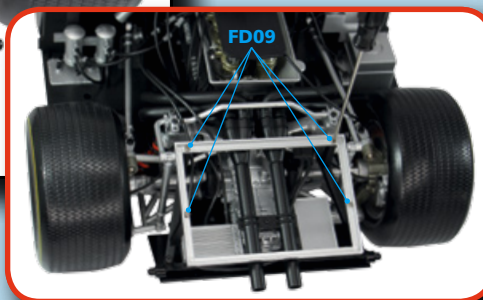

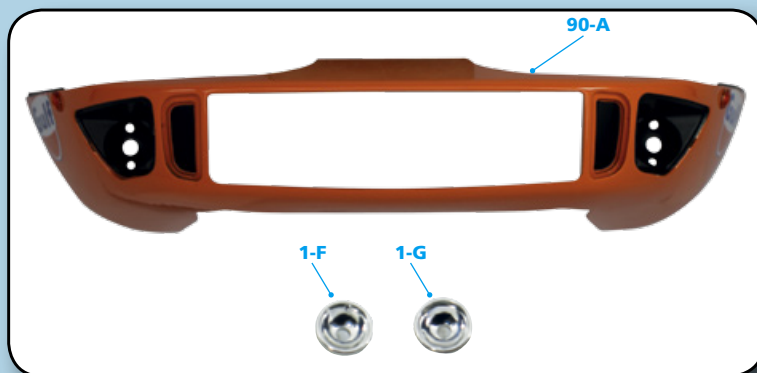


STEP 9I-7

Get the lower front panel (90A), the FP09 screws supplied with stage 90, and the right (1F) and left (1G) auxiliary lights.


STEP 9I-8

Insert the left auxiliary light (1G) into its housing on the outside of the lower front panel (90A). To insert the light correctly, the thinnest linchpin must be inserted into the top hole of the front panel, and the larger linchpin into the bottom hole.

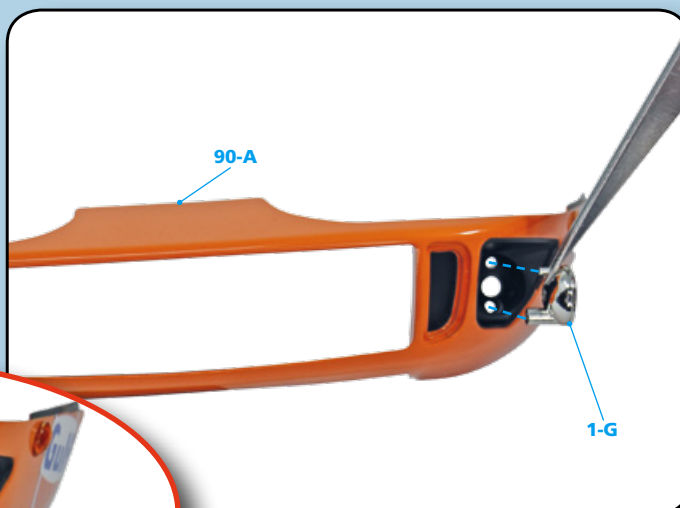


STEP 9I-9

Turn the front panel (90A) over and secure the bulb inside with a FP09 screw.

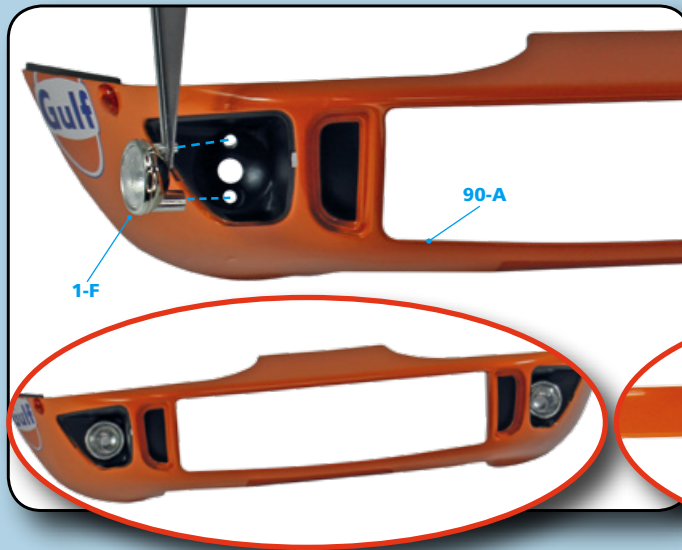

STEP 9-10

Repeat the previous step to attach the right light. Remember that the larger linchpin on the bulb goes into the bottom hole, and the thinner one into the top hole. Turn the lower front panel (90A) over and secure the bulb with a FP09 screw.

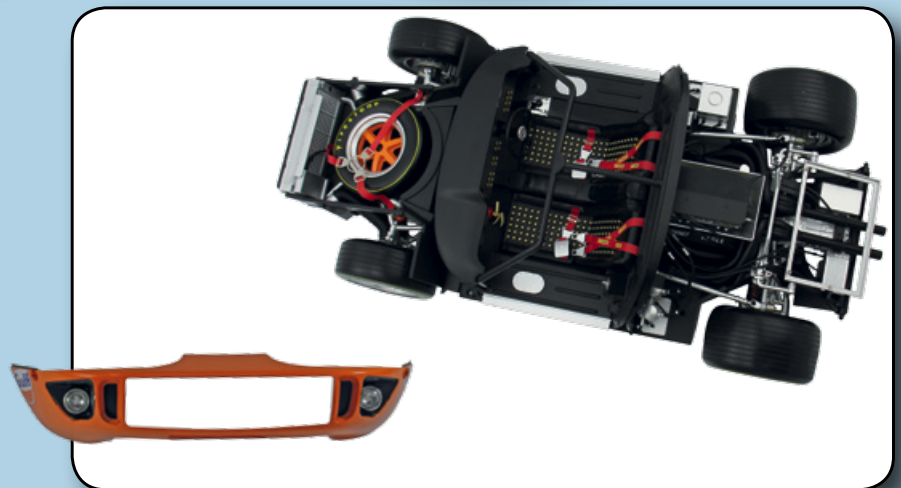

**STAGE
COMPLETE!**



STAGE 92: Headlight housings



YOUR PARTS

92-A Front right headlight housing

92-B Air intake manifold

92-C Screws FD01 2.3 x 4 mm

Ø 3.8 mm



92-A



92-B



FD01





STEP 92-1

Get the piece you assembled in the previous stage. Press the air intake manifold (91B) onto the front left headlight housing (91A).

STEP 92-2

Get the lower front panel (90A) and, from the inside, position the front left headlight housing (91A), as shown in the photo. Locate the three indicated mounting points and attach the housing to the panel.

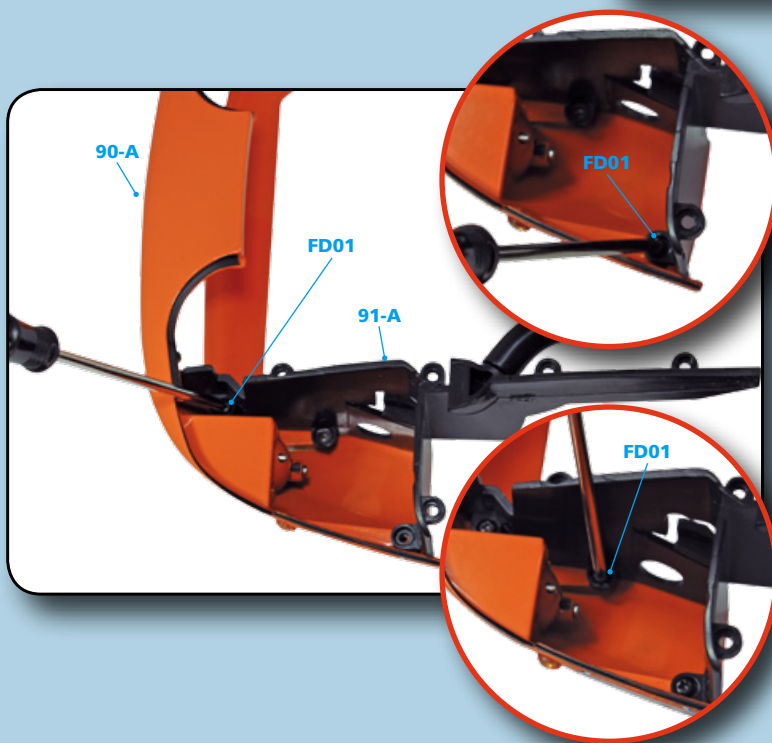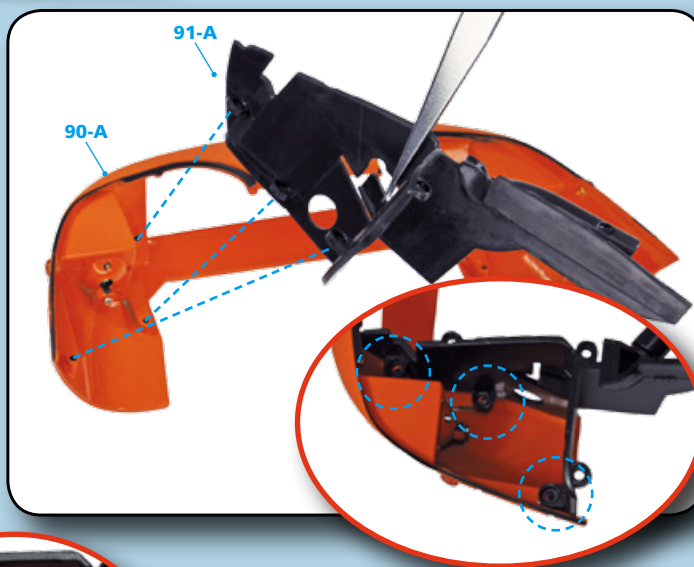

STEP 92-3

Secure the lower front panel (90A) and front left headlight housing (91A) assembly with three FD01 screws. To ensure they fit together perfectly, tighten the two screws at the ends first and the central screw last.



STEP 92-4

Now that the piece is complete, check that the panel (90A) and housing (91A) are assembled correctly.


STEP 92-5

Now repeat these steps on the righthand side: Press the air intake manifold (92B) onto the front left headlight housing (92A).



STEP 92-6

Position the housing (92A) over the lower front panel (90A). Locate the three indicated mounting points and attach the housing to the panel, as shown in the photo.

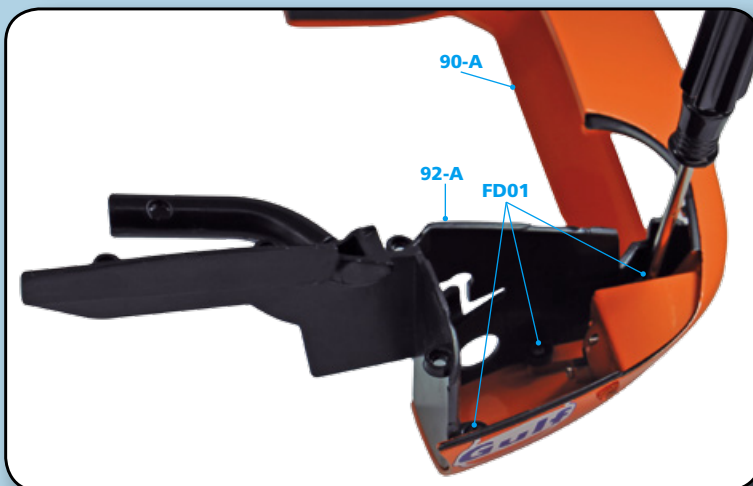

STEP 92-7

Secure the lower front panel (90A) and front right headlight housing (92A) assembly with three FD01 screws. Follow the instructions in step 3 to ensure they fit together perfectly.



**STAGE
COMPLETE!**



STAGE 93: Front left LED light and auxiliary light lens



YOUR PARTS

93-A Front left auxiliary
light lens


93-B Front left LED light

93-A



93-B



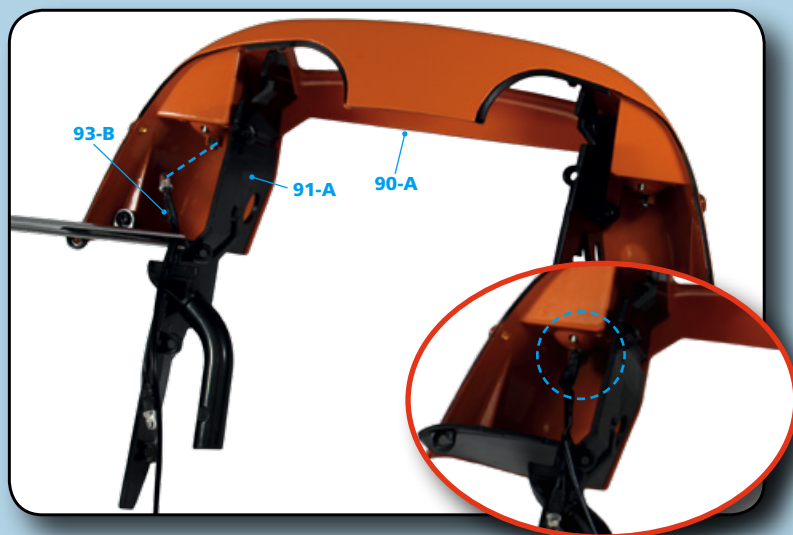

STEP 93-1

Get the piece you assembled in the previous stage. Insert the wire with the front left LED lights (93B) into the front left headlight housing (91A). Insert the LED light on the longer wire into the lower headlight housing.

STEP 93-2

Insert the second LED light of the front left headlights (93B), the one on the shorter wire, into the front left headlight housing (91A) and pull the end through the circular opening in the inside of the housing. Pull the wire all the way through.



STEP 93-3

Now put the front left auxiliary light lens (93A) into its housing on the outside of the lower front panel (90A). Be careful because the lens has two small flanges, one on each side, which go into the two slots in the panel.



STEP 93-4

Press the front left auxiliary light lens (93A) into its housing, pressing first on one side and then on the other. Check that the lens is in the correct position.



**STAGE
COMPLETE!**



STAGE 94: Front right LED light and auxiliary light lens



YOUR PARTS

94-A Front right auxiliary light lens

94-B Front right LED light

94-C Screws FD01 2.3 x 4 mm

Ø 3.8 mm



Each pack contains extra screws that you will need in the future.




STEP 94-1

Get the piece you assembled in the previous stage. Insert the wire with the front right LED lights (94B) into the front right headlight housing (92A). Insert the LED light on the longer wire into the lower headlight housing.

STEP 94-2

Insert the second LED light of the front right headlights (94B), the one on the shorter wire, into the front right headlight housing (92A) and pull the end through the circular opening in the inside of the housing. Pull the wire all the way through.

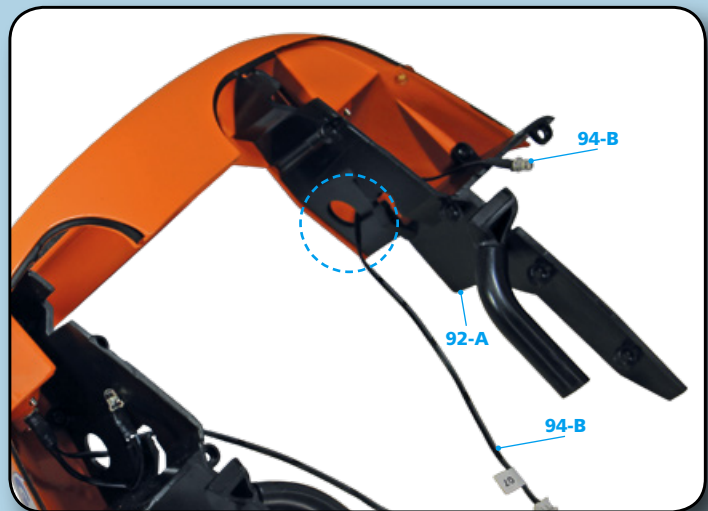

STEP 94-3

Now put the front right auxiliary light lens (94A) into its housing on the outside of the lower front panel (90A). Be careful because the lens has two small flanges, one on each side, which go into the two slots in the panel.



STEP 94-4

Press the front right auxiliary light lens (94A) into its housing, pressing first on one side and then on the other. Check that the lens is in the correct position.



STAGE COMPLETE!





STAGE 95: installing the front LED light



YOUR PARTS


95-A Central section of car body

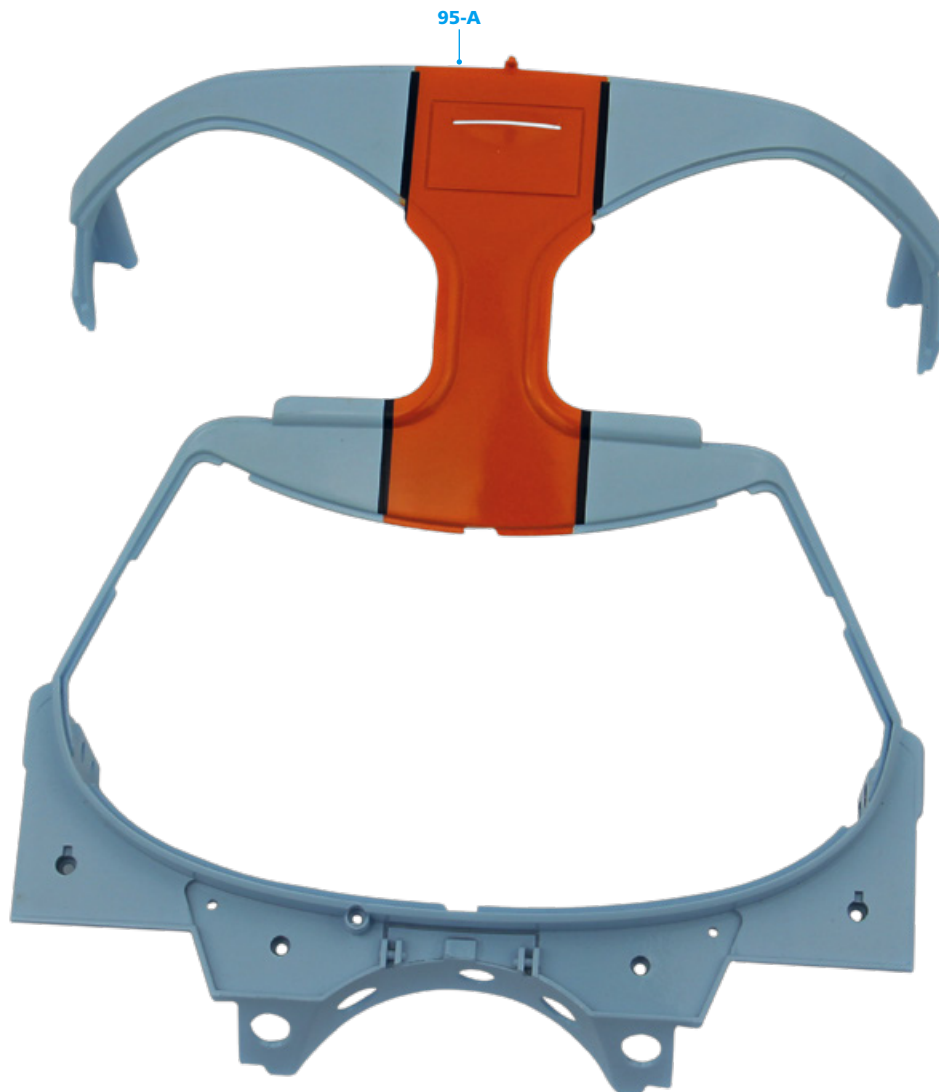

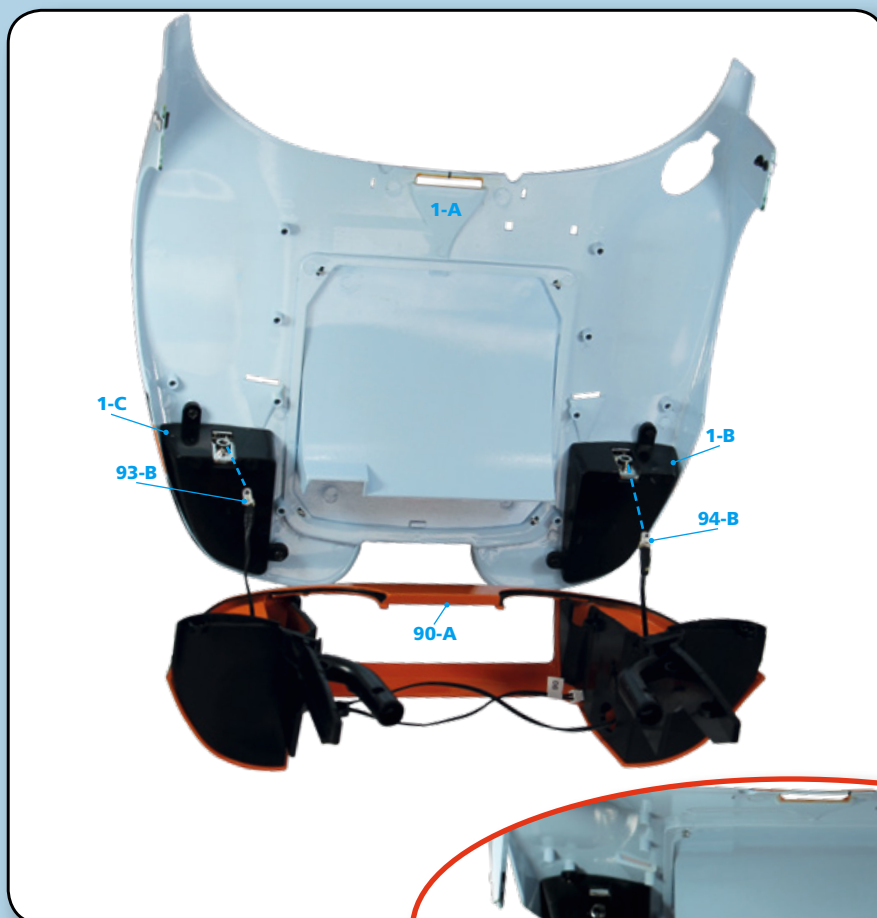

STEP 95-1

Get the bonnet (1A) and lower front panel (90A) assembly. Place the inside of the bonnet on the lower front panel. Insert the LED light (93B, short wire) into the front left headlight housing (1C). Repeat the operation on the righthand side by inserting the LED light (94B, short wire) into the front right headlight housing (1B).

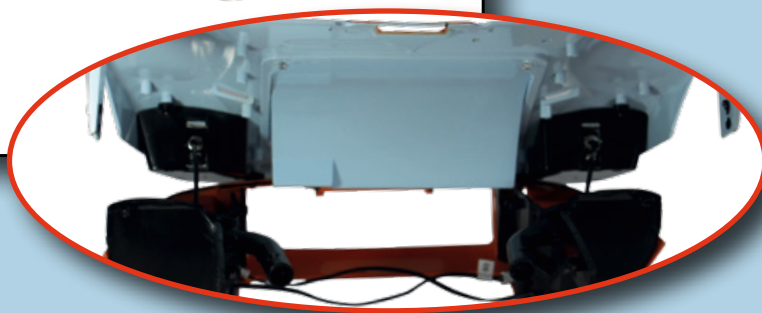

STEP 95-2

Turn the piece over and check that the parts are assembled correctly.





STEP 95-3

Turn the bonnet back over and secure the two pieces from the inside. To ensure they are assembled correctly, we recommend that you tighten the screws in the order shown in the photos: first tighten the two at the front, then the two at the back, and finally the two central ones, first on one side and then on the other. You will need a total of eight FD01 screws.



STAGE COMPLETE!

